

SVS-2101

Network Media Player

Solid-state Compact Flash

Network Digital Signage Media Player



The Network Media Player is an industrial-grade network-managed digital signage playback system engineered for usability and reliability.

Smooth DVD-Quality Video Playback

Display graphics and play fluid videos at up to 720x480 resolution for **maximum impact** on digital signage displays up to 20”.

Reliable Non-PC Technology

The Network Media Player features a low-power fanless design for reliable 24x7x365 operation. Dedicated processor technology eliminates the risk of virus infections and operating system crash common to PC-based solutions. Compared to a typical PC drawing over 100 watts, power consumption is cut by 90%, lowering your operation costs while conserving the environment. **Reliability, availability, and efficiency** result in one of the lowest TCOs (total cost of ownerships) in the industry.

Designed for Easy Management


You have a collection of PowerPoint slides, images and videos on your PC, but how do you transfer them to the big-screen? The bundled Signage Manager Express Software makes **content publishing** and **schedule management** easy. Create stunning slideshows in PowerPoint 2007 and publish them directly as multi-frame image slideshows (without animations). Create playlists quickly with included real-world templates and save the schedules for subsequent adjustments. When your schedule is set up, simply export all contents to a CF card and insert it into the player to start playback.

Applications


Supermarket Advertising
Chain Store Merchandising
Electronic Menu Boards
Airports & Train Stations
Gas Pump Advertising

Streamlined Interface

Program Schedule

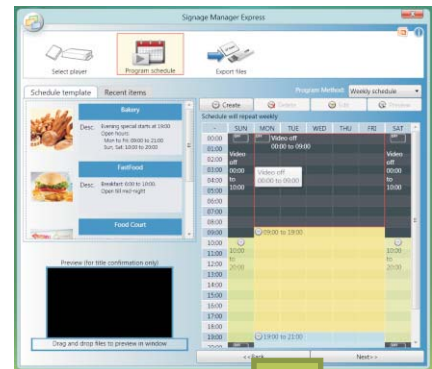

Export Files

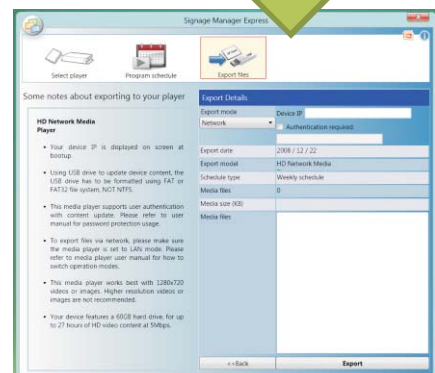


Product Photos



Signage Manager Express

Weekly Schedule Mode

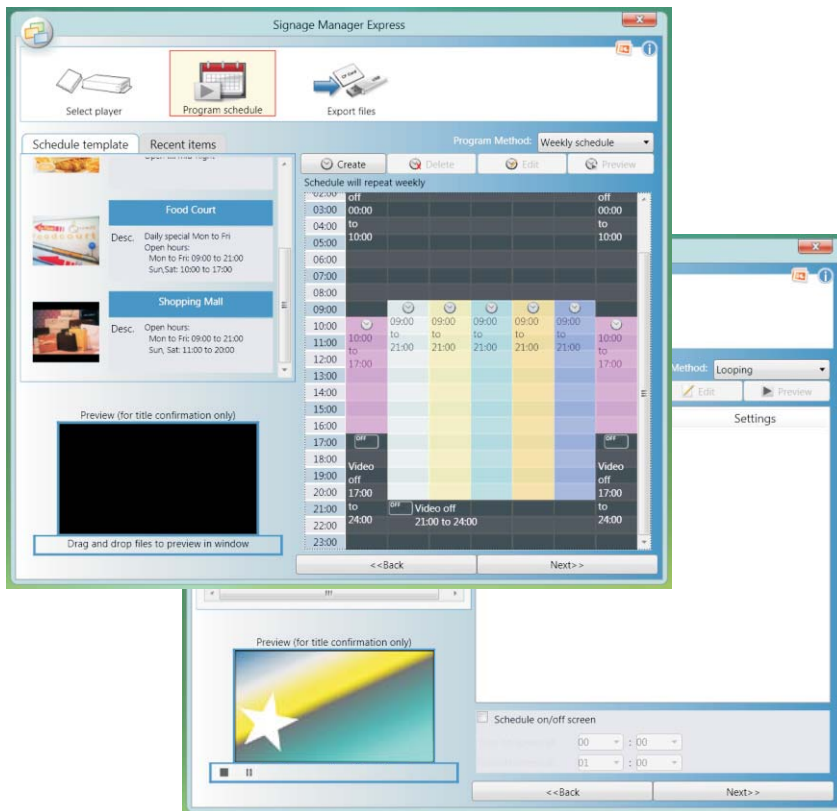

Simple Looping Mode

Technical Specifications

Video Codecs

MPEG-1/2 MP@ML (480p)
MPEG-4 ASP@L2 AVI

Image Format

JPEG (640x480)

Playback Control

Alphabetical looping
Simple Looping
Weekly Schedule

Content Management

LAN/USB/CF - Signage Manager Express

Physical Connectors

VGA
S-video, composite RCA
3.5mm audio jack
10/100 Base-T Ethernet
USB x 1

Local Storage

CF card required, sold separately (a 4GB card holds approx. 3 hours of compressed 480p video)

Accessories

RCA male-3.5mm female audio cable
3.5mm male-male audio cable
Ethernet cable

Power

Input: 5V @ 2A DC
Consumption: 5W typical

Environmental

Operating temperature: 0 to 40°C
Humidity: 5 to 85% @ 40°C, non-condensing

Dimensions (WxDxH)

5.3" x 4.4" x 1.0" (134mm x 114mm x 25mm)

Weight

Approx 1.8 lbs (0.8 kg)

Safety

UL-approved AC adapter

Certifications

CE/FCC

Warranty

1-year limited parts & labor



American Industrial Systems, Inc.

1768 McGaw Ave.

Irvine, CA 92614

Tel: (888) 485-6688

Fax: (949) 251-8697